


Introducing Eastern's new METAL STUD SYSTEM

for easier, faster, more economical dry wall installation

Eastern
Products Corporation

Eastern's new

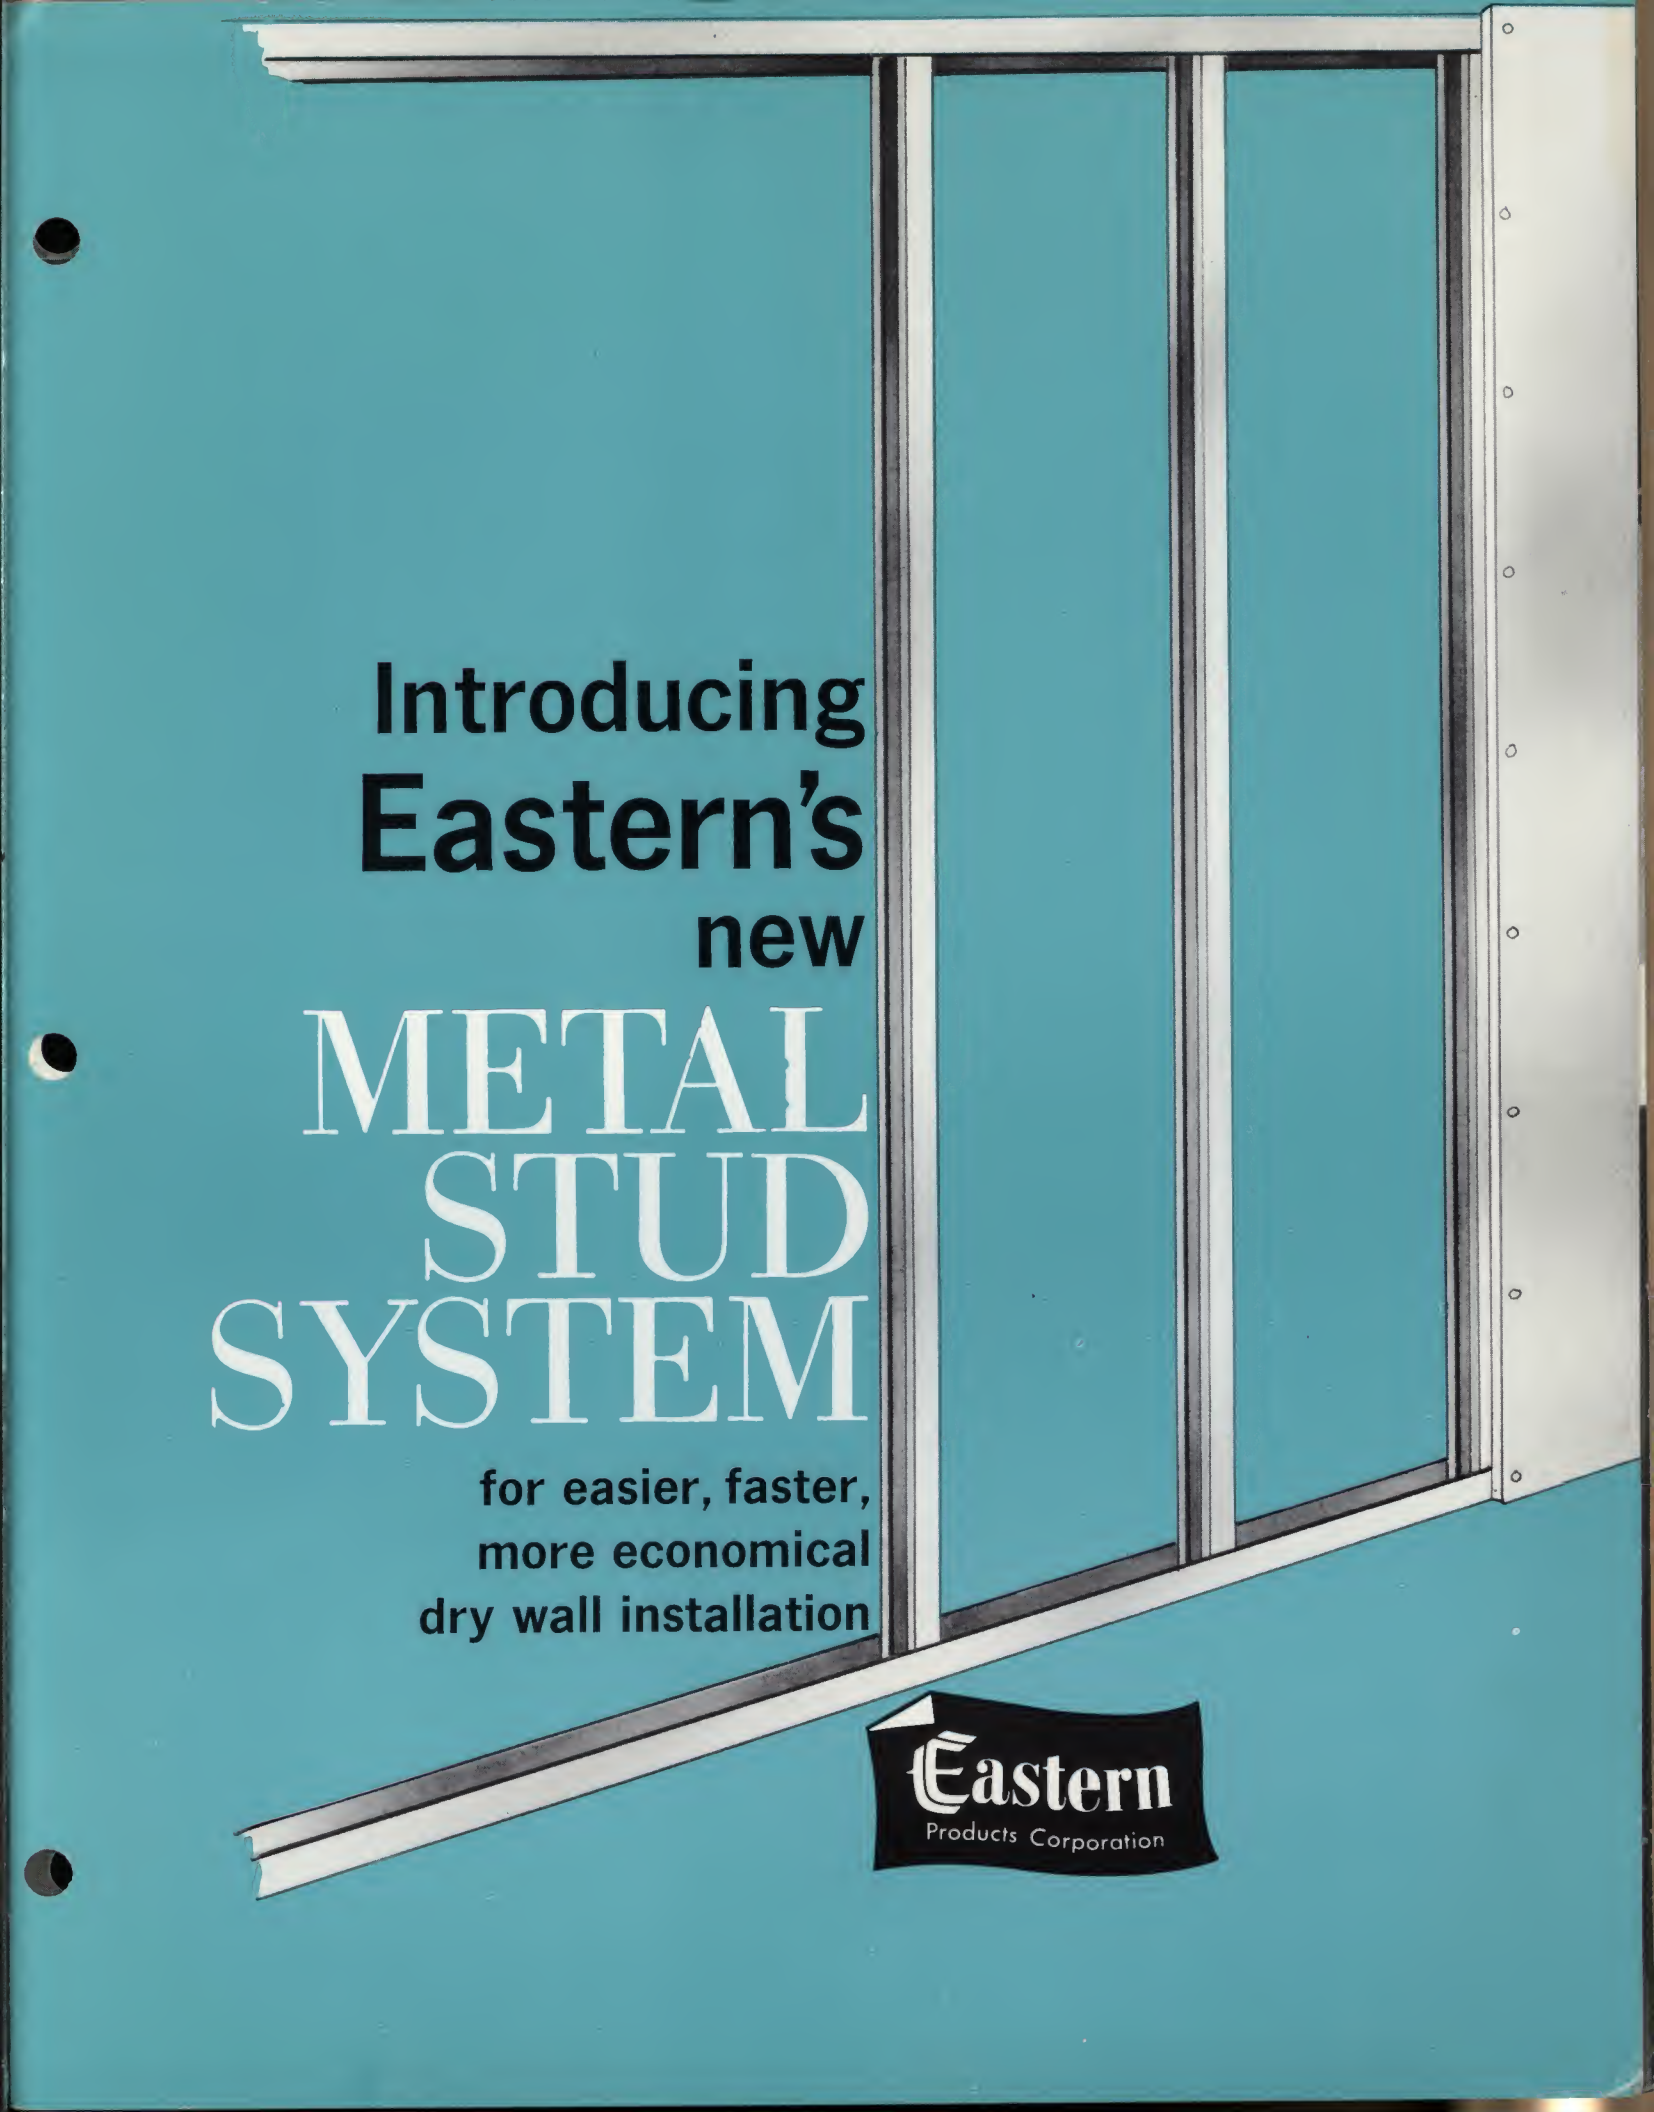


Specify studs every 16″ o.c. for 3/8″ wallboard; 24″ o.c. for 1/2″ and 5/8″ wallboard. Ample knockouts allow for chasing service lines and bridging. (1 5/8″ stud has modified oval knockouts only.)

Telescoping action makes studs self-splicing. Installation is quicker, easier . . . requires no extra parts. Snug, exact fit is automatic.



STUD WIDTH	MAX. HEIGHT
1 5/8″	9′0″
2 1/2″	12′0″
3 5/8″	16′0″

MULTI-STAGE FINISH PROTECTS AGAINST CONSTRUCTION ABUSE AND CORROSION . . .
makes Eastern's stud system equally suitable for plaster walls.

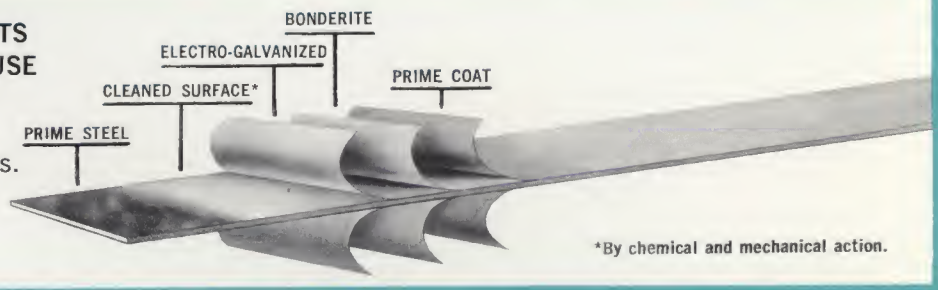

*By chemical and mechanical action.



441

HERMAN MILLER INC.

Auditorium Lobby

Eastman Kodak Recreation Center
Rochester, New York

Auditorium "Green Room"





Bowling Lanes and Lounge Area

Eastman Kodak Recreation Center
Rochester, New York


Bowlers Lounge


HERMAN MILLER INC




metal stud system offers simple, fast, durable economical installation for any wallboard.

Economy of parts . . . unique self-splicing feature . . . and durable multi-stage finish . . . make this system ideal for non-load-bearing construction. It consists of roll-formed 25-gauge metal track and stud in three versatile widths. Gypsum or other wallboard panels are attached to either one or both sides with self-drilling sheet metal type screws.

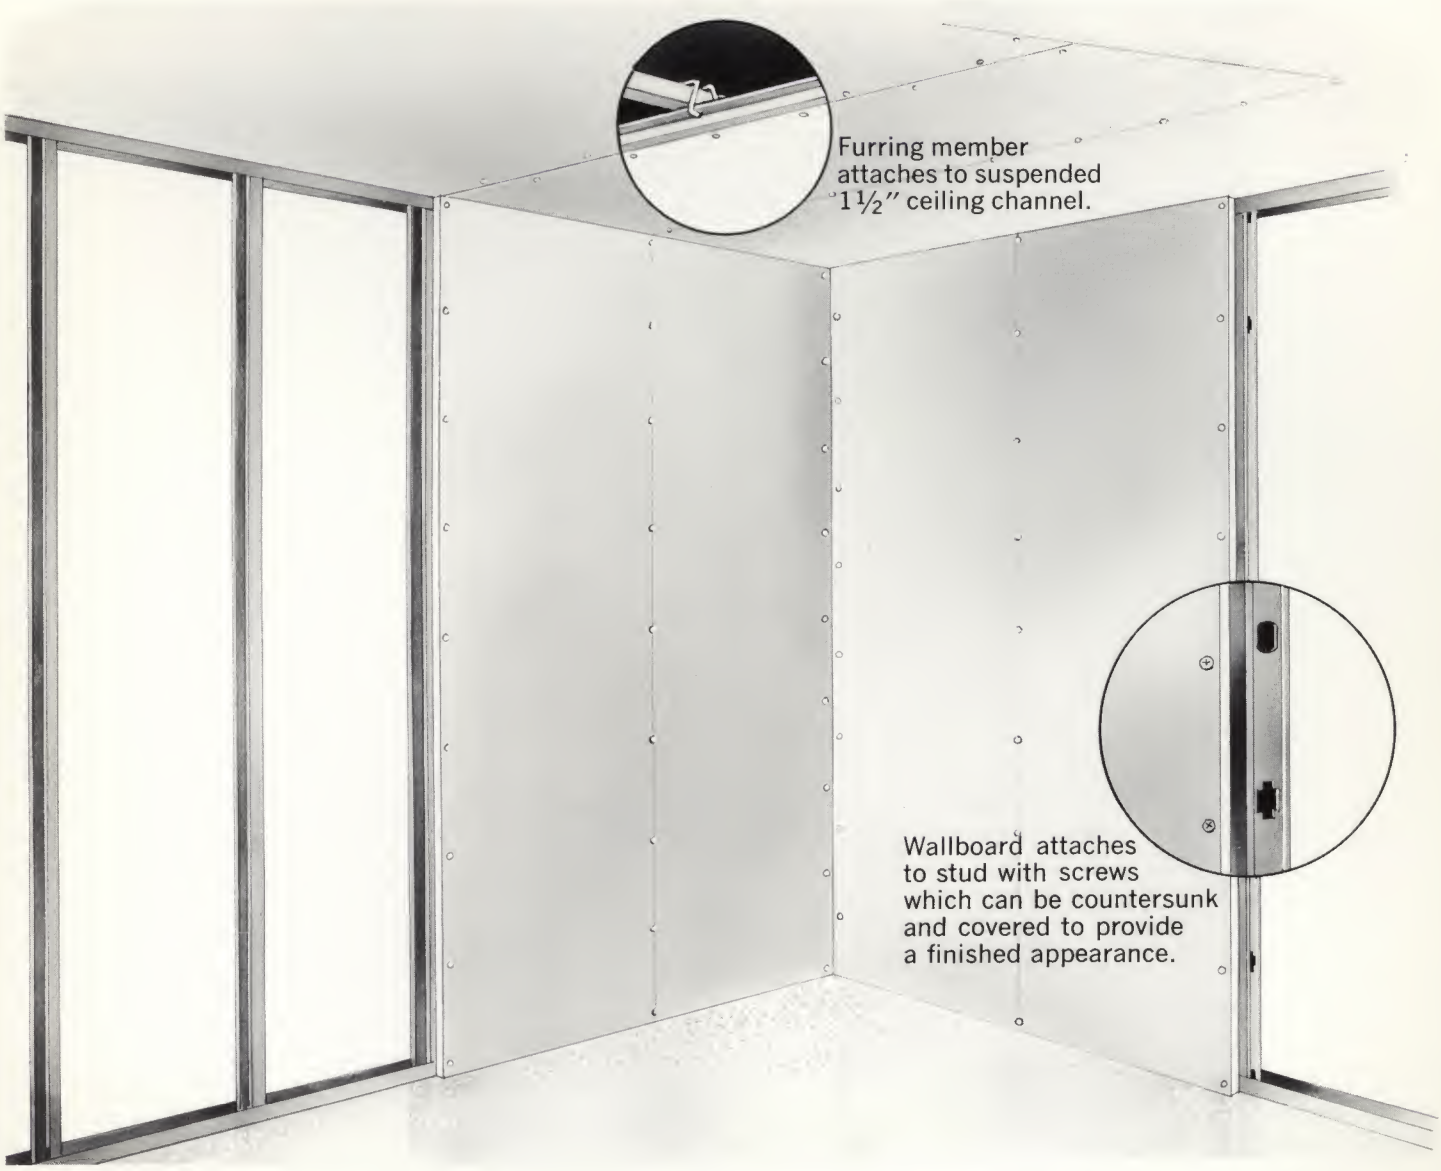


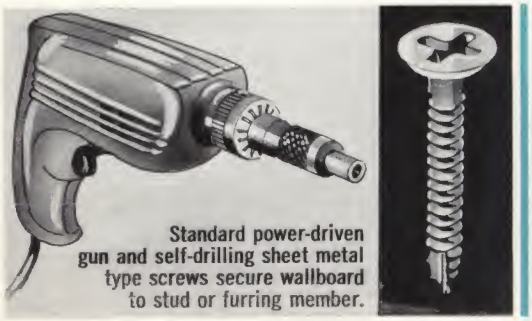

Standard power-driven gun and self-drilling sheet metal type screws secure wallboard to stud or furring member.

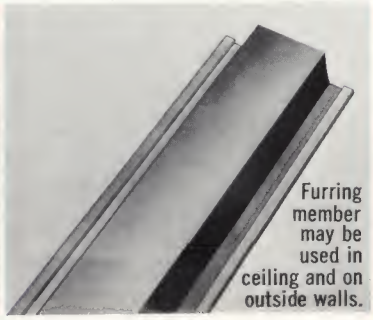

Furring member may be used in ceiling and on outside walls.

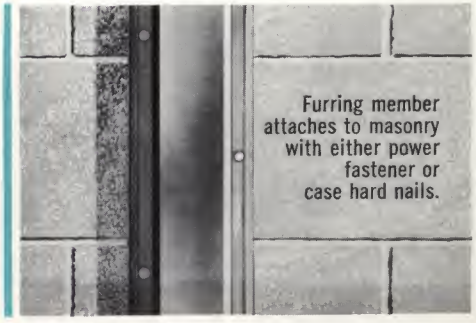

Furring member attaches to masonry with either power fastener or case hard nails.

Eastern's METAL STUD SYSTEM

STUD The stud channel is roll-formed in widths of 1⅝", 2½" and 3⅝". It is supplied in standard lengths for most requirements, as well as special lengths for any specific need. Knockouts are provided at ends and midpoint of stud for chasing service lines and bridging with 1½" or ¾" channel.

FLOOR AND CEILING TRACK The track channel is roll-formed in three widths corresponding to studs, specifically formed to keep studs in position until wallboard is attached. Length for all widths is 12 feet.

WALLBOARD FASTENER Panels are attached by means of self-drilling one-inch sheet metal type screws with a #8 head. Radius under head affords maximum surface depression and protection of board surface. Screws (available from Eastern Products) are applied with standard power screw gun.

VERSATILITY This system may be specified for use with practically any type of wallboard in non-load-bearing construction (subject to board manufacturer's recommendations and limiting stud heights shown on page 2). Single or multi-construction may be employed, with boards running horizontally or vertically.

STUD SPACING Spacing is determined by thickness of wallboard material. Maximum 16" o.c. is recommended for ⅜" panels; 24" o.c. for ½" and ⅝" panels.

FURRING MEMBER The furring member is roll-formed to produce a flanged channel for furring outside masonry wall . . . or attachment to 1½" ceiling channel. (See illustrations on page 3.)

For complete information write:

EASTERN PRODUCTS CORP.

1601 Wicomico Street / Baltimore 30, Maryland . . .
or contact any of these conveniently located Eastern sales offices:

Eastern Products Corporation

New York
261 Fifth Ave., Suite 514
2500 - 83rd Street
North Bergen, New Jersey

Chicago
2533 N. Elston Ave.
Los Angeles
2717 S. Carrier Ave.

Dallas
5119 Sharp St.
Detroit
5131 Grand River Ave.

Atlanta
260 Westminster Drive, N.E.
Pittsburgh
335 Washington Ave., Bridgeville

Toronto
111 Ronald Ave.
Montreal
5750 Royalmount

Eastern's METAL STUD SYSTEM

Digitized by:



ASSOCIATION FOR PRESERVATION TECHNOLOGY
www.apti.org

For the

BUILDING TECHNOLOGY HERITAGE LIBRARY

https://archive.org/details/buildingtechnologyheritagelibrary

From the collection of:

Tulane University | SOUTHEASTERN ARCHITECTURAL ARCHIVE
SPECIAL COLLECTIONS
HOWARD-TILTON MEMORIAL LIBRARY

http://seaa.tulane.edu

For complete information write:

EASTERN PRODUCTS CORP.

1601 Wicomico Street / Baltimore 30, Maryland . . .
or contact any of these conveniently located Eastern sales offices:

Eastern Products Corporation

New York
261 Fifth Ave., Suite 514
2500 - 83rd Street
North Bergen, New Jersey

Chicago
2533 N. Elston Ave.

Los Angeles
2717 S. Carrier Ave.

Dallas
5119 Sharp St.

Detroit
5131 Grand River Ave.

Atlanta
260 Westminster Drive, N.E.

Pittsburgh
335 Washington Ave., Bridgeville

Toronto
111 Ronald Ave.

Montreal
5750 Royalmount